




## How to: Fitting an Armrest

Move passanger seat so you can remove the screw thats under the cover. This enables you to lift the centre console later.




Take a flat head screwdriver place under the cover and push up.

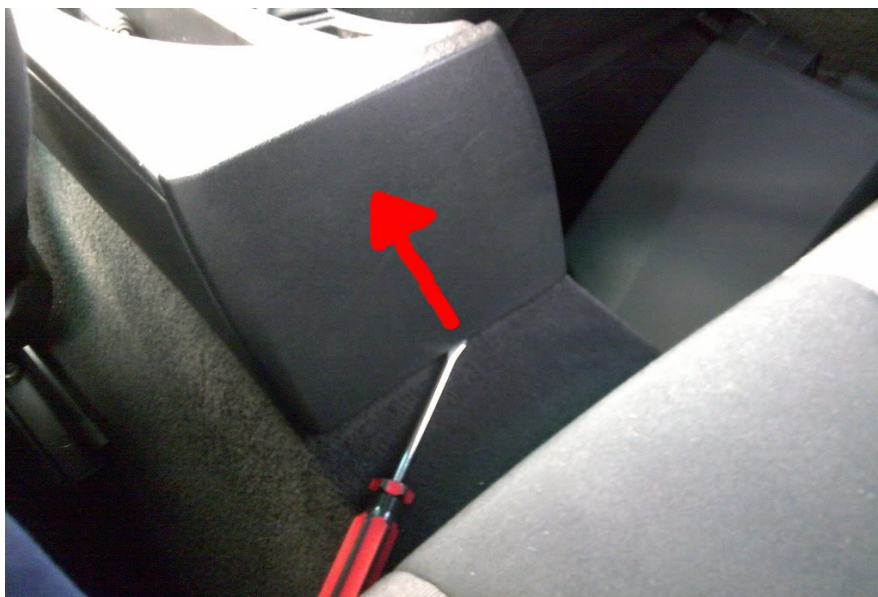




Then remove the two nuts and two bolts, and remove the plastic plate by lifting the console up and pulling the plate down and manouver it so it can be removed.

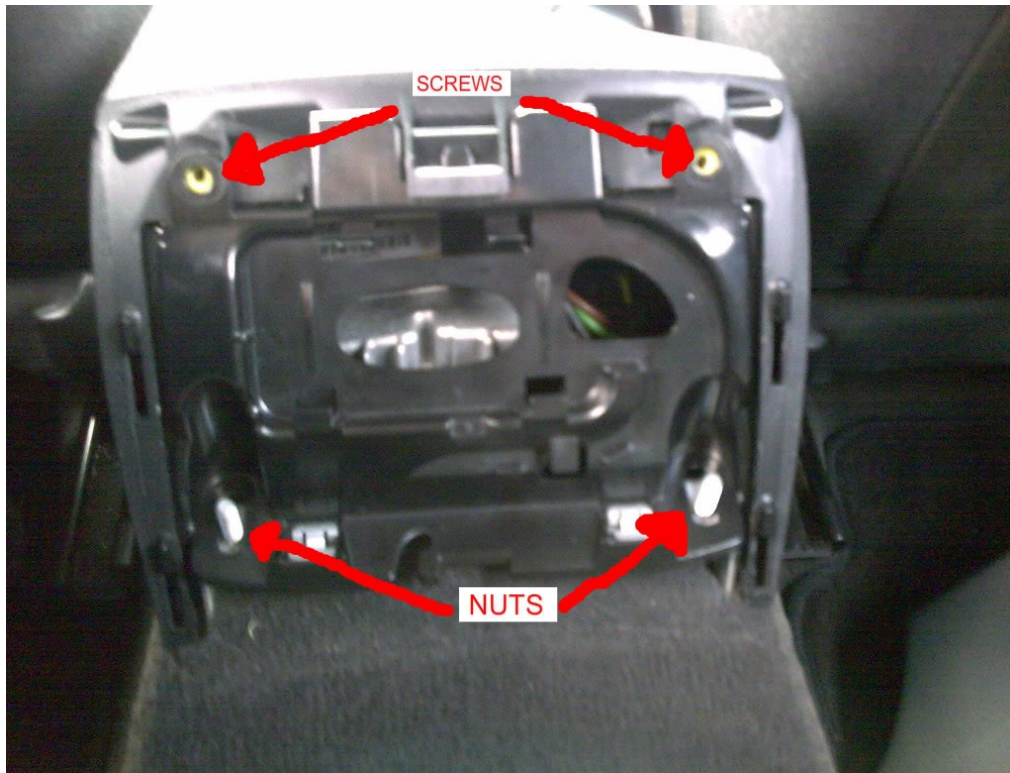

Fit armrest into the console then fit screws and nuts.

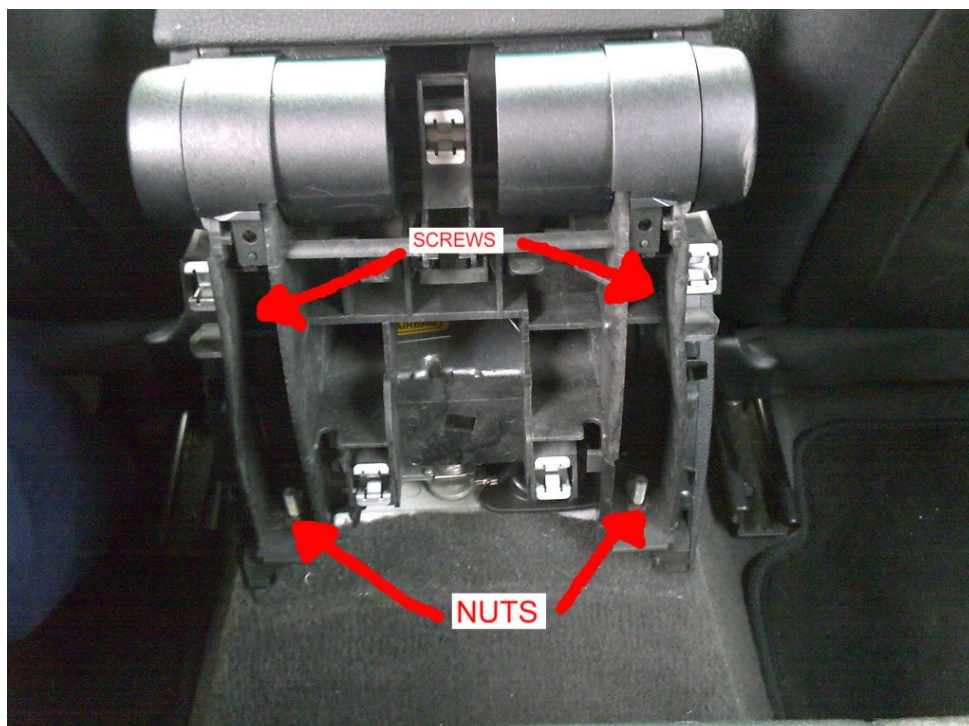

**Then fit new cover buy pushing it on until it clips in.**



**Just for refrence the armrest i fit to my 2005 reg car was from a 2008 reg.**

**"only concerns would be how much the centre console needs to be lifted – I'm hoping not that much and that I can ignore any effect it has on the handbrake etc. Also finding a wee spanner small enough to turn those nuts as the space looks pretty small."**

**Get a 10mm socket and put the flat screwdriver into the end where a wratchet would go and turn. It won't have any effect on the handbrake. It hasn't effected anything on my car. The only things it could effect is the cig lighter and the aux port but mine still worked after removing and fitting twice.**

**Oh and the screws are torx head don't know what size tho sorry.**

**Like this, the size on the nut is 10mm so put the screwdriver in the other end. It acts like a wobble bar.**



**You only need to lift it up enough to pull it down about one to two inches, push it into the console and turn the plate and pull one end out. You can even push the two sides of the console apart a little to give you extra room. Just take your time picture how to remove it in your head first, don't get frustrated or you will brake something. But i didn't brake anything when i did mine.**